

MV1-D1312-160


1.4 Megapixel resolution with proprietary Photonfocus sensor

Features

- 1312 x 1082 pixel resolution
- Global Shutter
- Dynamic range up to 120 dB via LinLog®
- Up to 110 fps @ full resolution
- Sensor without cover glass
- Multiple Regions of Interest (MROI)
- CameraLink® interface
- 12 bit greyscale
- On camera shading correction
- Superior Signal-to-Noise Ratio (SNR)
- CE, RoHS & WEEE compliant



Spectral response

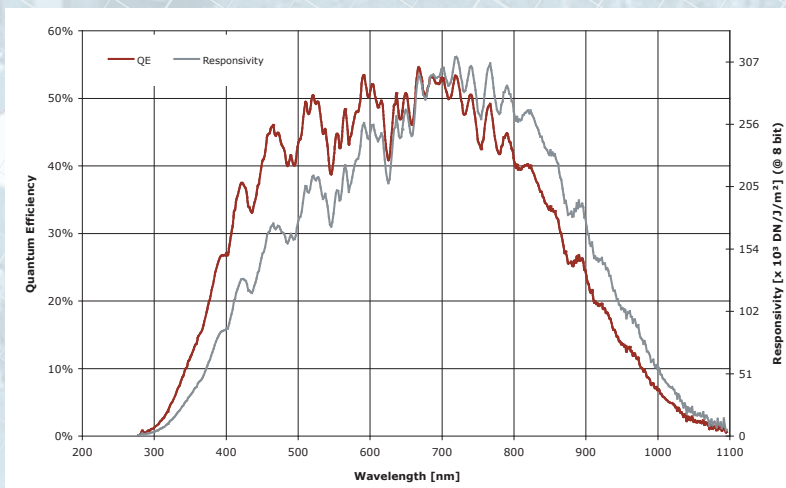

MV1-D1312-160-CL-12

Image Sensor

Image sensor	Photonfocus A1312-160 (3. Generation)
Technology	CMOS active pixel (APS)
Scanning system	Progressive scan
Optical format / diagonal	1" (13.6 mm diagonal) maximum resolution 2/3" (11.6mm diagonal) 1024 x 1024 resolution
Resolution	1312 x 1082 pixels
Pixel size	8 µm x 8 µm
Active optical area	10.48 mm x 8.64 mm (maximum)
Random noise (RNS)	< 0.3 DN RMS @ 8 bit / gain = 1
Fixed pattern noise (FPN)	< 3.4 DN RMS @ 8 bit / gain = 1
Dark current	0.65 fA/pixel
Full well capacity	~100 ke
Spectral range	< 400 to 1030 nm (to 10 % of peak responsivity) • Very good NIR response
Responsivity	210 x 10 ³ DN / (J/m ²) @ 625 nm / 8 bit / gain = 1 (approximately 620 DN / (lux s) @ 625 nm / 8 bit / gain = 1)
Quantum Efficiency	> 50 %
Optical fill factor	> 60 %
Dynamic range	60 dB in linear mode; 120 dB with LinLog®
Colour format	Monochrome
Characteristic curve	Linear, LinLog®
Shutter mode	Global shutter
Read out mode	Sequential read out or simultaneous read out (read out during exposure only in linear mode) for higher frame rates

Camera

Exposure time	10 µs ... 0.41 s / 25 ns steps
Frame rate	108 fps @ full resolution
Pixel clock	80 MHz
Camera taps	2
Greyscale resolution	12 bit / 10 bit / 8 bit
Analogue gain	1
Digital gain	1 / 2 / 4
Configuration interface	CL SERIAL (9600 or 57600 baud, user selectable)
Trigger modes	• Free running (non triggered) • Interface trigger • External trigger input
Features	• Multiple Regions of Interest (MROI) • On camera shading correction • Strobe output
Interface	CameraLink® base configuration
Operating temperature	0 °C ... +50 °C
Power supply	+12 V DC (+/- 10 %)
Power consumption	< 3 W
Lens mount	C-Mount (CS-Mount optional)
Dimensions	60 x 60 x 45 mm ³
Mass	265 g
Conformity	CE / RoHS / WEEE
Special	Adjustable backfocus; Opto-isolated I/Os

Software

Camera Control	PFRemote™ graphical user interface (GUI) and PFLib (SDK)
OS	win2k; winxp; winvista; other OS (Linux, QNX, etc.) on request